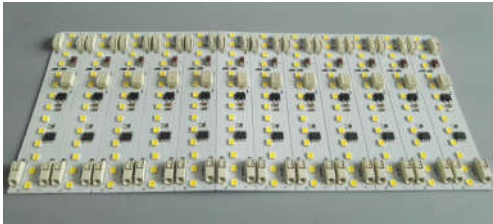
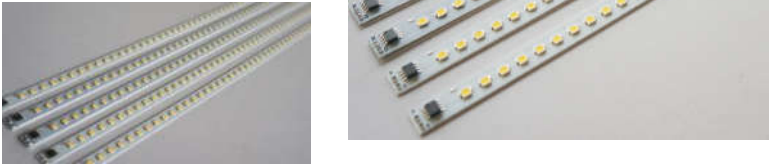
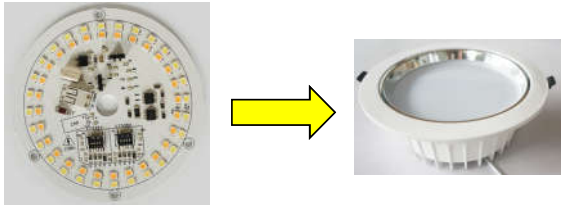
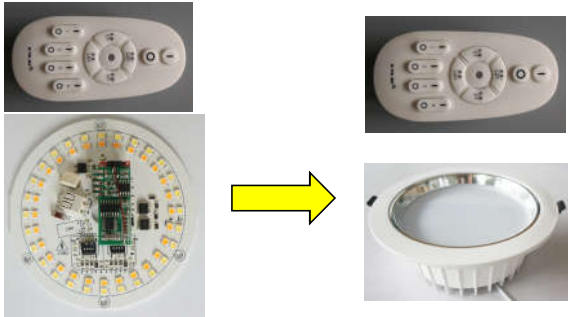
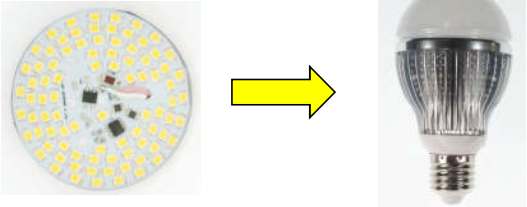
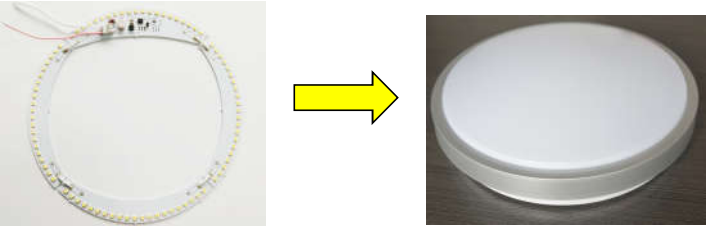


230V Driverless Led Strip / LED Module

Part No.	Product Description	EXW Price(USD/pcs)	
		Unit Price	MOQ
FL-2835W14H-01	105mm Non-watereproof LED 2835 rigid strip light : Dimension:105*19mm Power: 5W Input voltage: 200-240 AC (Driverless) Lumen: 35-40lm/led, 14leds per strip CRI>80 with WAGO connectors at both sides		
FL-2835W28HD-03	300mm Non-watereproof LED 2835 rigid strip light : Dimension:300*19mm; Power: 7-8W Input voltage: 200-240 AC (Driverless) Lumen: 35-40lm/led, 28leds per strip CRI>80 supporting 0-100% SCR(Triac) smooth dimming		
FL-2835W78H-0.6	600mm Non-watereproof LED 2835 rigid strip light : Dimension:536*9.5mm; Power: 9-14W available Input voltage: 200-230 AC (Driverless) Lumen: 23-26lm/led, 78leds per strip CRI>80 supporting SCR(Triac) dimming	 	

FL-2835W156H-1.2	1200mm Non-waterproof LED 2835 rigid strip light : Dimension:1135*10mm; Power: 18-28W available Input voltage: 200-230 AC (Driverless) Lumen: 23-26lm/led, 156leds per strip CRI>80 supporting SCR(Triac) dimming			
FL-2835W156H-1.5	1500mm Non-waterproof LED 2835 rigid strip light : Dimension:1435*10mm; Power: 18-28W available Input voltage: 200-230 AC (Driverless) Lumen: 23-26lm/led, 156leds per strip CRI>80 supporting SCR(Triac) dimming			
FL-R2835W-WW56HD CCT changeable	88mm W-WW LED 2835 round module: Dimension: $\varnothing$ 88mm Power: 12-24W Input voltage 200-240V AC (Driverless) Lumen: 35-40lm/led, 28pcs W.W LED + 28pcs P.W LED Color Temp.: Changeable from 2800-7000K Power Factor >0.95, CRI>80 or 90 supports manual brightness adjustable 0-100% (16 steps) Low THD < 20%			
FL-R2835W-WW56HD CCT changeable	88mm W-WW LED 2835 round module: Dimension: $\varnothing$ 88mm Power: 12-24W Input voltage 200-240V AC (Driverless) Lumen: 35-40lm/led, 28pcs W.W LED + 28pcs P.W LED Color Temp.: Adjustable from 2800-7000K Power Factor >0.95, CRI>80 or 90 With 2.4GHz Remote controller, CCT changeable from 2800 to 7000K, brightness 0-100% dimmable Low THD < 20%			

FL-R2835W78H-D60	60mm Non-watereproof LED 2835 round module: Dimension: $\varnothing$ 60mm; Power: 9-14W available Input voltage: 200-230 AC (Driverless) Lumen: 23-26lm/led, 78leds per strip CRI>80 supporting SCR(Triac) dimming 		
FL-R2835W84H-D190	190mm Non-watereproof 2835 annular LED module: Dimension: $\varnothing$ 190mm (external diameter) $\varnothing$ 150mm (inner diameter) Power: 16-18W Input voltage: 200-230 AC (Driverless) Lumen: 23-26lm/led, 84leds per strip CRI>80 supporting SCR(Triac) dimming 		

Welcome customized products